


Link do produktu: <https://www.specdiag.pl/tesla-model-x-2015-dokumentacja-techniczna-schematy-instrukcje-napraw-katalog-czesci-p-827.html>



Tesla Model X 2015+ - Dokumentacja Techniczna - Schematy - Instrukcje napraw - katalog części


Cena

399,00 zł

Opis produktu

Tesla Model X 2015+
Instrukcje napraw, schematy elektryczne,
katalog części, lokalizacja złącz w wiązce,
instrukcje obsługi i serwisowania.

Connector Detail: amp_929053-2

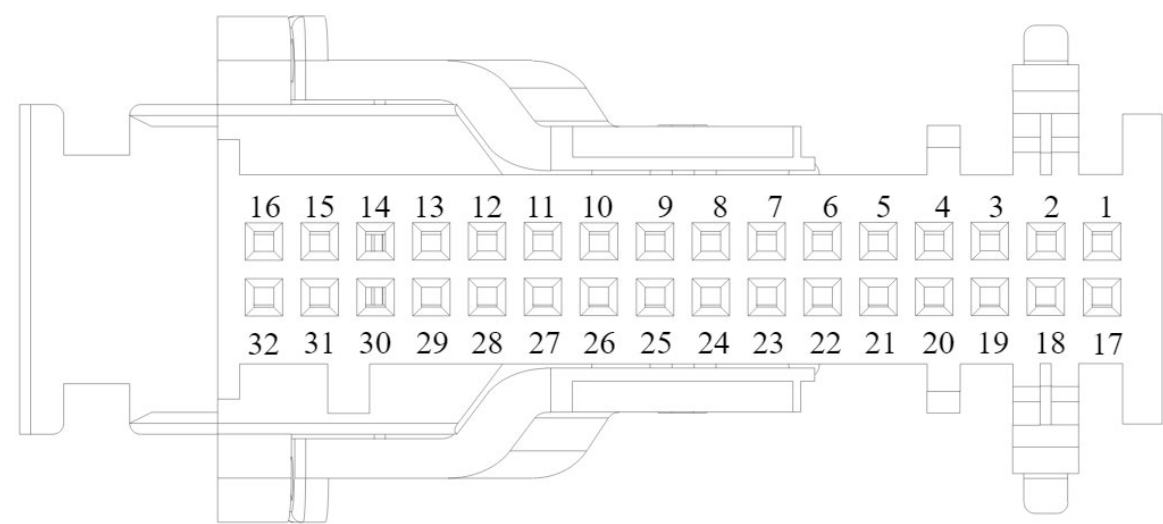


Gender: UNSPEC

Color: Blue


Cav	Col	Gauge
3	BK	0.75
6	BU/WH	0.5
7	VT	0.75
8	WH	0.75
8	WH	0.75
9	BK	0.75
12	RD/WH	0.35
13	GN/WH	0.35
14	VT/WH	0.35
15	BK/WH	0.35
16	GY/WH	0.35
17	BU	0.75
18	BU	0.75
19	BK	0.75
22	BU/WH	0.5
23	BK/VT	0.75
24	BK/WH	0.75
24	BK/WH	0.75
25	BK	0.75
28	RD	0.35
29	GN	0.35
30	VT	0.35
31	BK	0.35
32	GY	0.35

Connector - X023

Location:

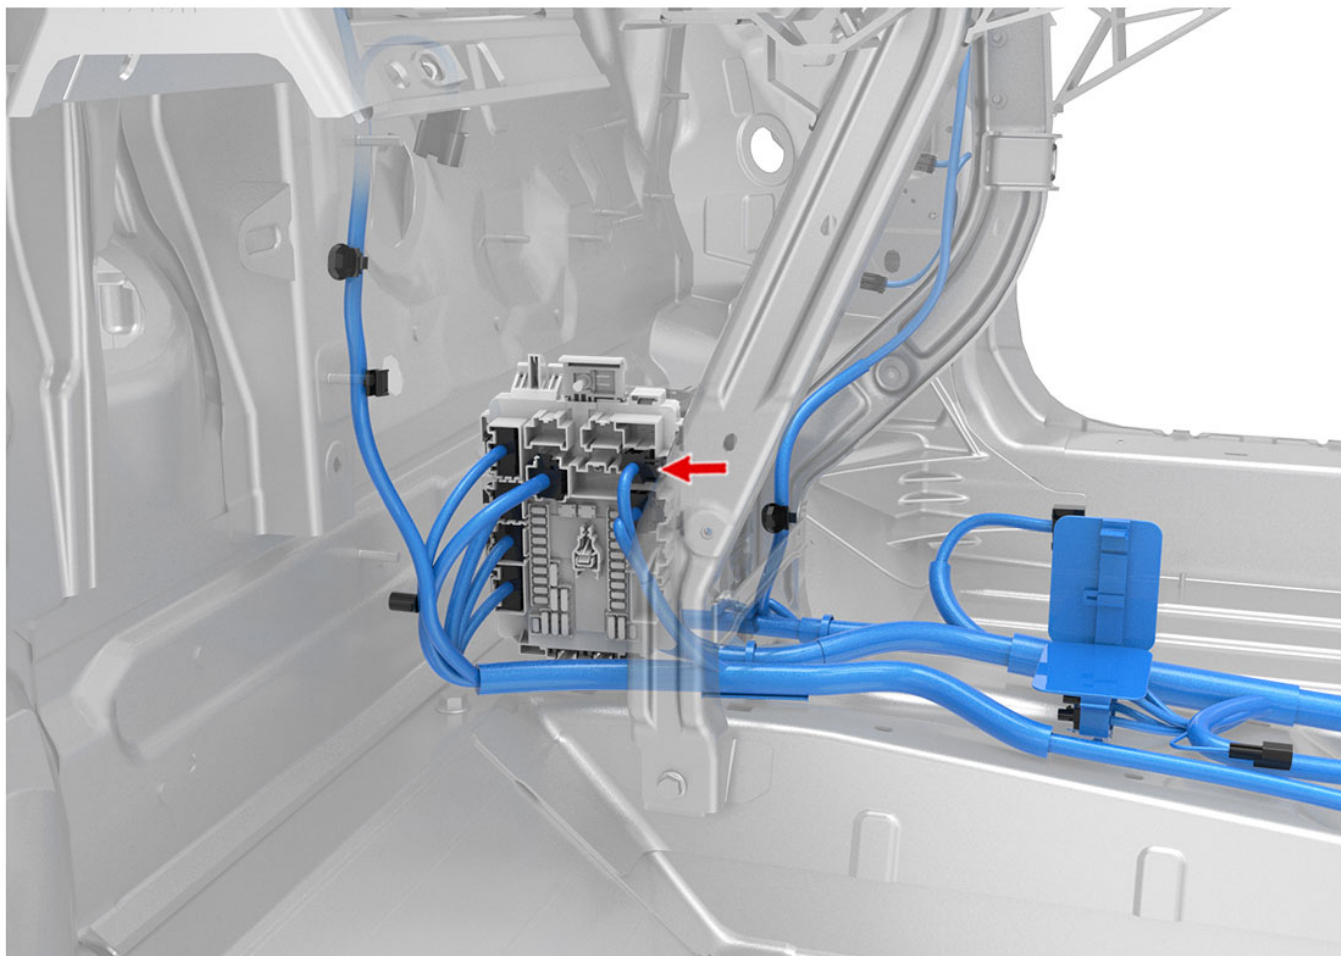


H – Main Body – 1032429

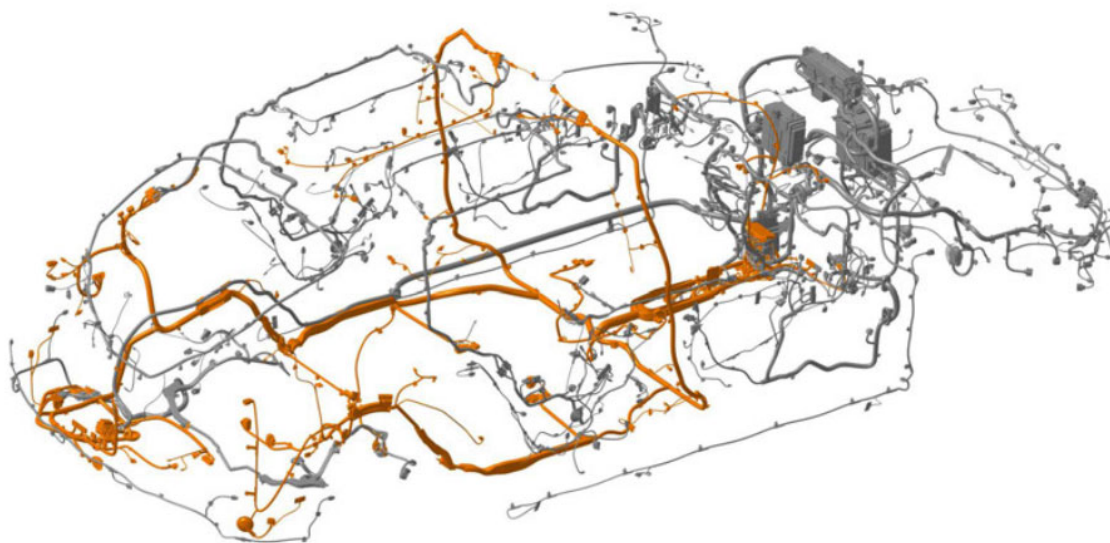

cardian.com

Zakładki	
📄	Contents
📖	Using the Parts Manual
📁	Parts Categories
>	10 - BODY
>	11 - CLOSURES
>	12 - EXTERIOR FITTINGS
>	13 - SEATS
>	14 - INSTRUMENT PANEL
>	15 - INTERIOR TRIM
>	16 - BATTERY SYSTEM
>	17 - ELECTRICAL
>	18 - THERMAL MANAGEMENT
>	19 - LABELS
>	20 - SAFETY AND RESTRAINT
>	21 - INFOTAINMENT
>	30 - CHASSIS
>	31 - SUSPENSION
>	32 - STEERING
>	33 - BRAKES
>	34 - WHEELS AND TIRES
>	39 - FRONT DRIVE UNIT
>	40 - REAR DRIVE UNIT
>	44 - HIGH VOLTAGE SYSTEM

Dash Panel

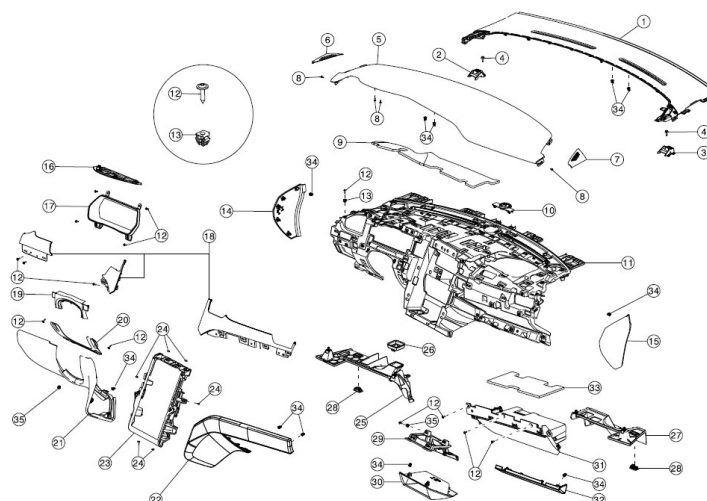


No.	Part Name	Category	Part Description	Part Number	Qty	Comments
1	ASSY GRILLE DEFROST MX		ASSY GRILLE DEFROST MX	1035569-00-H	1	
2	OB IP SUPPORT BRACKET LH MX		OB IP SUPPORT BRACKET LH MX	1051519-00-C	1	

Lamp - Fog - Front - LH (Remove and Replace)

FRT No: 17404002

Removal

1. Prepare a padded workbench or other area on which to set the fascia when it is removed in the next step.
2. Remove the front fascia assembly ([refer to procedure](#)). Place the fascia on the padded workbench.
3. Disconnect the harness from the fog lamp.




[View large image.](#)

4. Disconnect the clip that secures the harness to the top of the fog lamp.




[View large image.](#)

5. On each side of the fascia, remove the 2 screws that secure the duct housing (torque 1 Nm).




[View large image.](#)

6. Release the fasteners that secure the top of the fog lamp (torque 2.5 Nm).



[View large image.](#)

7. Release the fasteners that secure the base of the fog lamp (torque 2 Nm).



[View large image.](#)


8. Remove the fog lamp.
-



Unlocking When the Key Doesn't Work

If Model X does not unlock when you walk up to it, or when you press the unlock button on your key, the key's battery may be dead. If this is the case, you can still unlock and drive Model X.

To unlock Model X (and disable the security alarm), first position the key at the base of the door pillar between the front door and the falcon wing door, on the driver's side of the vehicle, as shown. Then press the front driver's door handle. If Model X doesn't unlock, try adjusting the position of the key. The key must be in the correct position. If Model X still doesn't unlock, remove the key's battery and try again. See [Replacing the Key Battery](#) on page 5.



To drive Model X, place the key against the center console, immediately below the 12V power outlet, then press and hold the brake pedal to turn Model X on.

Note: Unlocking Model X using this method disables walk-away locking. You must manually re-enable walk-away locking after replacing the key's battery.

For instructions on how to replace the key's battery, see [Replacing the Key Battery](#) on page 5.

Opening Interior Doors with No Power

If Model X has no electrical power, the front doors open as usual using the interior door handles. To open the rear doors, carefully remove the speaker grille from the door and pull the mechanical release cable down and towards the front of the vehicle. After the latch is released, manually lift up the door.



Kontakt: tel: 530 894 984