

Dane aktualne na dzień: 29-04-2024 13:50

Link do produktu: <https://www.specdiag.pl/komatsu-wb91r-2-sn-91f20001-and-up-komatsu-wb93r-2-sn-93f20001-and-up-instrukcje-napraw-schematy-instalacji-dtr-p-1457.html>



Komatsu WB91R-2 SN 91F20001 AND UP - Komatsu WB93R-2 SN 93F20001 AND UP - Instrukcje Napraw + Schematy Instalacji + DTR -

Cena **250,00 zł**

Opis produktu

Komatsu WB91R-2 SN 91F20001 AND UP
Komatsu WB93R-2 SN 93F20001 AND UP

Instrukcje napraw - schematy instalacji - DTR

DISASSEMBLING

STEP 11

Remove the brake shaft.



STEP 12

Remove the toothed ring.



STEP 13

Remove the 1st stage sun gear.



WORK EQUIPMENT - ONE PIECE BOOM

PW150ES-6K



Circuit diagram related to engine preheater/start- ing motor/charging system



 **90 ± 3 Nm {9.2 ± 0.3 kgm}**

2]

 **Recheck the torque:
90 ± 3 Nm {9.2 ± 0.3 kgm}**

3]

 **90° ± 5° (Tighten with an angle tightening tool.)**

- a Tool **A6**: wrench is adopted for angle tightening. (Refer to the tool list.) (Refer to the tool list.)



- When an angle tightening tool is not used:
Put marks on the cylinder head and bolts with a felt-tip pen, and then tighten the bolts an additional 90° ± 5°.



- Install push rods (57).
- Install rocker arm support (58).



- Fuel injector assembly


- ✗ Check that there is no damage or dust on the fuel injector sleeve.

1. Install O-ring (63) and gasket (64) to fuel injector (62).


2. Coat O-ring (63) and the head side of fuel injector (62) with engine oil (EO15W-40).

 O-ring (63) and the head side of fuel injector (62): **engine oil (EO15W-40)**

3. Install holder (65) to fuel injector (62) with concavity and convexity (A) fitted together.

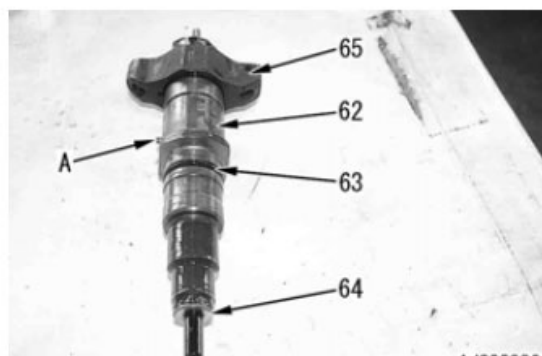

DISASSEMBLY OF PRESSURE COMPENSATION VALVE ASSEMBLY

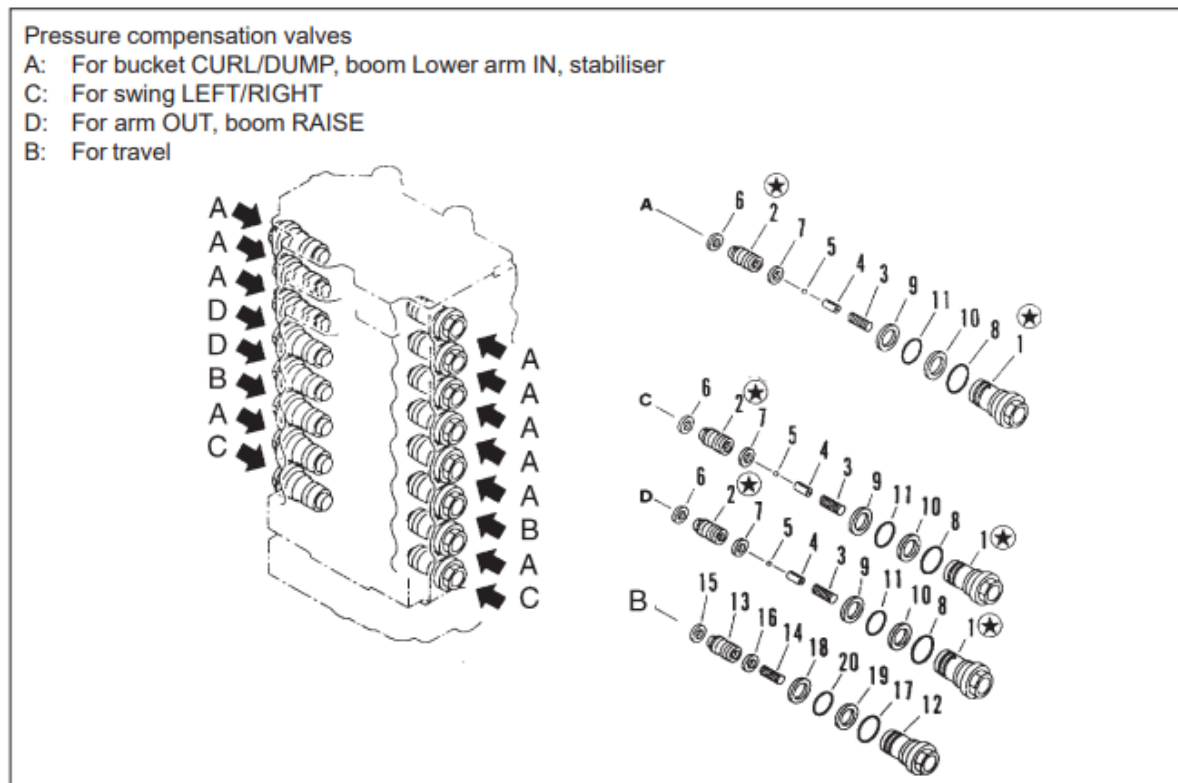

• Disassembly of pressure compensation valves A,C,D

- The structure of the parts for pressure compensation valves A, C en D is the same, but the part number for the assembly marked ★ is different, so be careful when assembling.

1. Remove piston (2) and spring (3) from sleeve (1).
2. Remove plug (4) and ball (5) from piston (2).
3. Remove seals (6) and (7) from piston (2).
4. Remove O-ring (8) from sleeve (1), then remove seals (9) and (10), and O-ring (11).

- * After disassembling, if there is any abnormality in sleeve (1), piston (2), plug (4), ball (5), or seals (6) and (7), replace the whole pressure compensation valve assembly.

• Disassembly of pressure compensation valve B


1. Remove piston (13) and spring (14) from sleeve (12).
2. Remove seals (15) and (16) from piston (13), then remove O-ring (17), seals (18) and (19), and O-ring (20) from sleeve (12).

- * After disassembling, if there is any abnormality in sleeve (12), piston (13), or seals (15) and (16), replace the whole pressure compensation valve assembly.

IDENTIFICATION OF PRESSURE COMPENSATION VALVE ASSEMBLY

Valves are identified by markings on the valve assembly.

FRONT TRAVEL MOTOR (20 Km/h TRAVEL SPEED SPEC.)

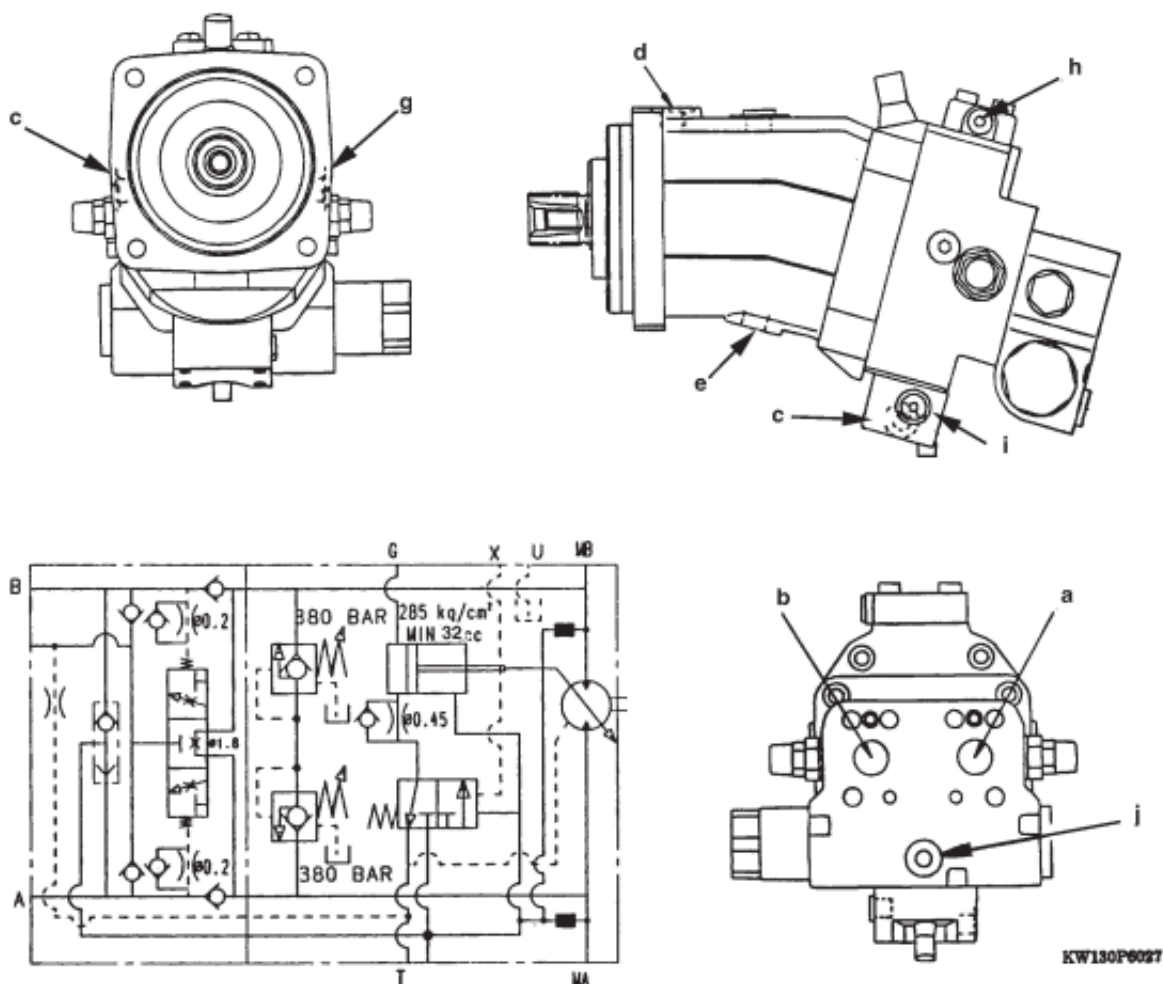

HYDRAULIC SCHEMATIC

SPECIFICATIONS



Type: Variable displacement piston motor

Theoretical delivery: Min. 32 cc/rev
Max. 80 cc/rev

Hi-Lo switching-pressure: 2.94 MPa (30 kg/cm²)
Rated speed: 4968 rpm. (Max)

- a. Motor inlet (A)
- b. Motor outlet (B)
- c. Override pressure port (X)
- d. Drain port (U)
- e. Drain port (T)
- f. Pressure test port (MB)
- g. Pressure test port (MA)
- h. Pressure test port (M1)
- i. Pressure test port (G)


SWING MOTOR

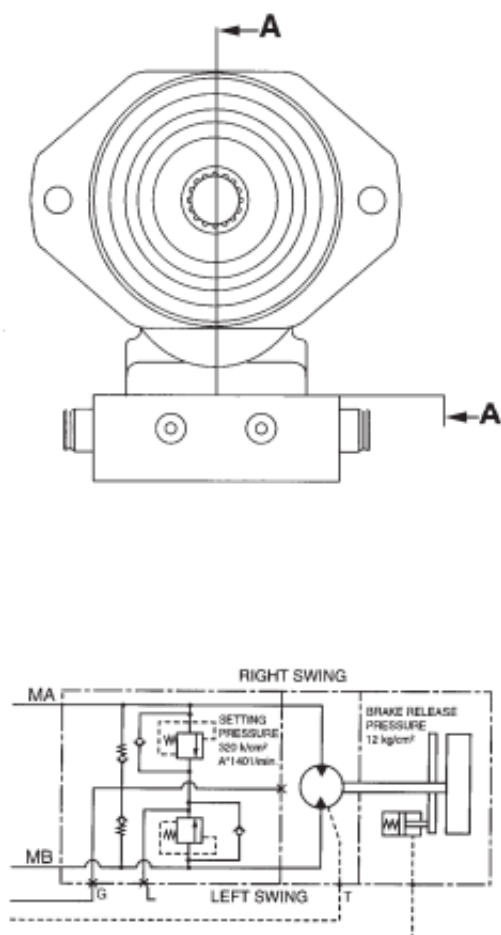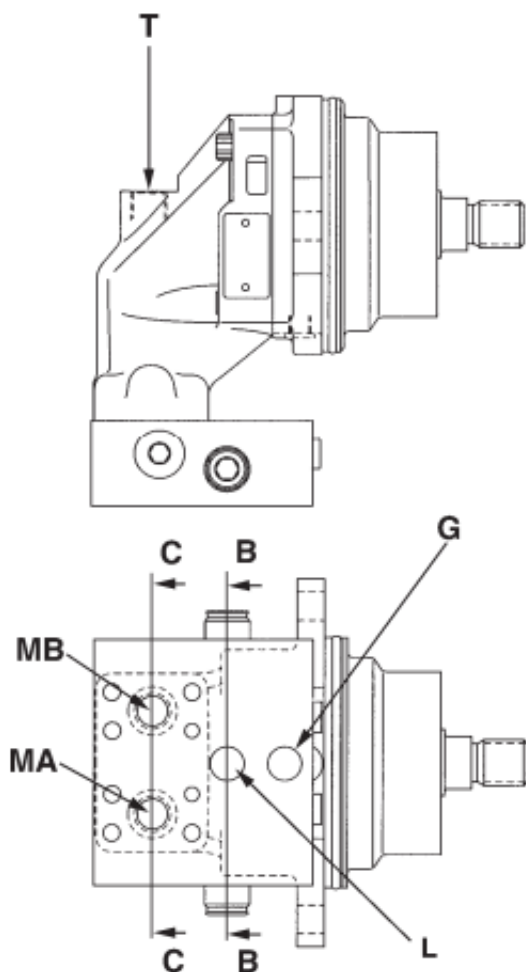

- a. Port **G** (to control valve TSW port)
- b. Port **MB** (from control valve)
- c. Port **MA** (from control valve)
- d. Port **T** (to tank)
- e. Port **L** (plugged)

SPECIFICATIONS

Type	F12-060-MF-CV-C-509
Theoretical delivery	59.8 cc/rev
Safety valve set pressure	31.36 MPa (320 kg/cm ²)
Rated speed	2250 rpm

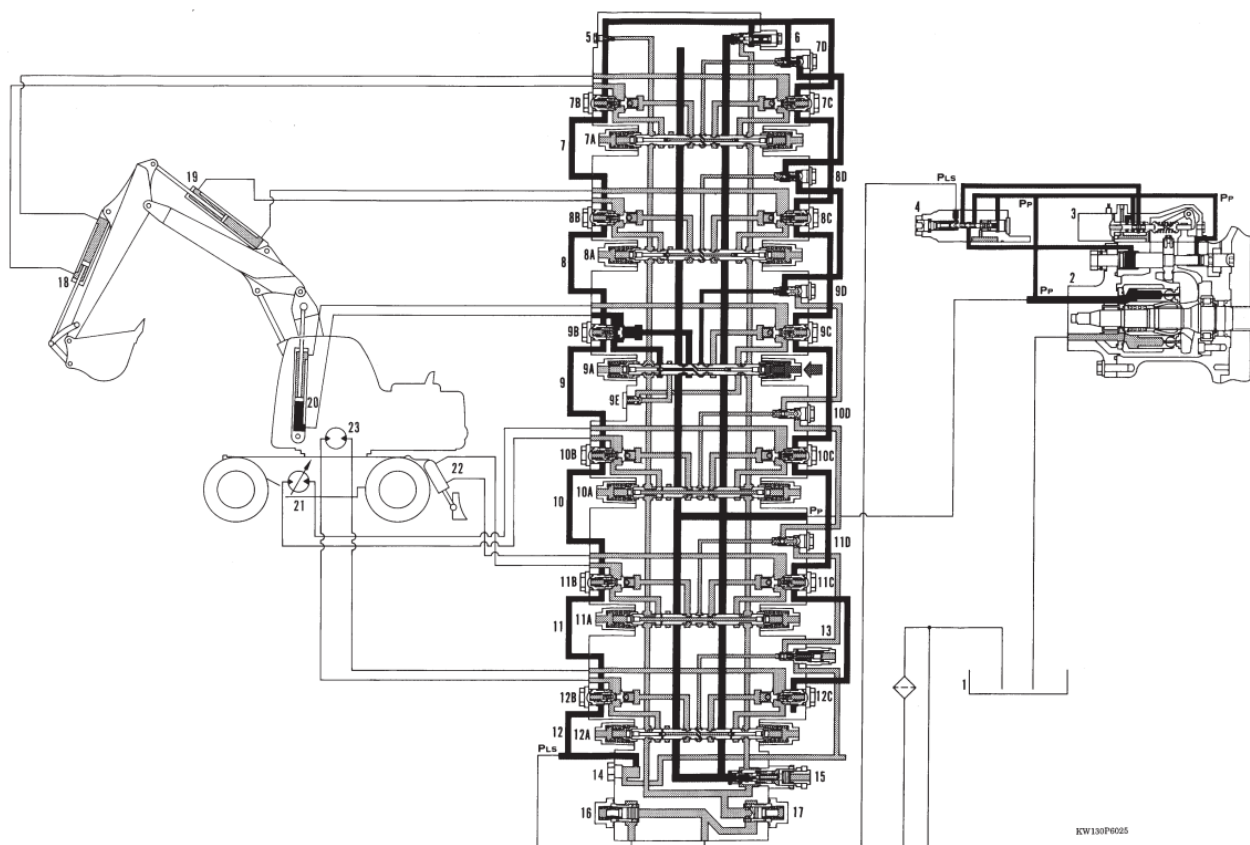

Dokumentacja serwisowa:

Komatsu WB91R 2 SN 91F20001 AND UP
Komatsu WB93R 2 SN 93F20001 AND UP

10-89

Powyższe zdjęcia pochodzą z losowych instrukcji napraw do maszyn budowlanych marki Komatsu.

Po zakupie otrzymają Państwo dokumentację do właściwego wybranego modelu maszyny.

Format PDF

Język angielski

Kontakt tel: 696 915 311

motodiagnostyka2010@gmail.com

Szukasz instrukcji napraw, schematów lub DTR do innego modelu? Zadzwoń lub napisz do nas.